

Canon

iPF510


 **imagePROGRAF®**
iPF510



**TECHNICAL
DOCUMENTS**
LARGE-FORMAT PRINTING



2008 Overall MONOCHROME and COLOR COPIER Market Share

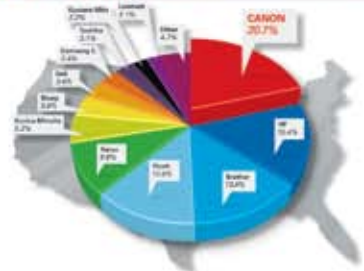

iPF510

SPECIFICATIONS



Print-Head
PF-03

Technology
FINE (Full-Photolithography Ink-Jet Nozzle Engineering)

Print Resolution (Max.)
2400 x 1200 dpi

Line Accuracy*
±0.1% or Less

Minimum Line Weight**
0.02mm

Number of Nozzles
Matte Black: 5, 120 Nozzles
Other Colors: 2,560 Nozzles per Color

Droplet Size
4 Picoliter

Nozzle Pitch (Head Resolution)
1200 dpi x Two Rows

Print-Head Swath
1.07 inch

Ink Type
Dye
Cyan (C), Magenta (M), Yellow (Y), Black (BK)

Pigment
Matte Black (MBK) – Two Channels

Ink Tank
PFI-102

Ink Tank Capacity***
130ml per Tank

Number of Colors
5

Ink Supply Method
Tubing System

Nozzle Recovery System
Non-firing Nozzle Detection and Compensation

Printer Controller
L-COA Controller

Printer Memory
192MB

Media Feed
Top-Loading Manual Feed, Front-Loading Manual Feed, Cassette, Optional Top-Loading Roll Feed

Media Width

Roll Feed*, Manual Feed
8" – 17" (203mm – 432mm)

Cassette
8" – 17" (203mm – 432mm)

Printable Margins

Roll Feed*
All Sides: 0.12" (3mm) or 0" for Borderless

Cassette
All Sides: 0.12" (3mm)

Manual Feed
Left, Right, Trailing: 0.12" (3mm),
Leading: 0.90" (23mm) or 0.12" (3mm)

Minimum Printable Media Length

Roll Feed*
8.0" (203mm)

Cassette
10.0" (254mm)

Top-Loading Manual Feed
10.98" (279mm)

Front-Loading Manual Feed
20.5" (520mm)

Maximum Print Length†

Roll Feed*
59" (18m)

Cassette
23.38" (594mm)

Manual Feed
Top: 24" (609mm) 63" when roll feed unit is attached
Front: 36" (914mm)

Cassette Capacity (Plain Paper)
250 Sheets (Letter-Sized), 100 Sheets (up to 13" x 19" Sized), 50 Sheets (up to 17" x 22" Sized)

Borderless Printing Widths (Roll Media Only)†
10", 13", 14", 16", 17", B4 (10.12"/257mm),
A2 (16.54"/420mm)

Media Cutter
Durable Rotary Blade

Media Thickness

Cassette
0.08 – 0.3mm (3.2 – 11.8mil)

Top-Loading Manual Feed
0.07 – 0.8mm (3.2 – 31.4mil)

Front-Loading Manual Feed
0.5 – 1.5mm (19.6 – 59.0mil)

Roll Feed*
0.07 – 0.8mm (2.8 – 31.4mil)
Media Core Sizes: 2" or 3" Core
(2/3" Core Adapter Included)
Maximum Roll Outer Diameter: 5.9" (150mm)

Software

Printing Software
imagePROGRAF Printer Driver for Windows/Mac, HDI Driver††, Printer Driver Extra Kit for Windows/Mac (Free Layout, Color imageRUNNER® Enlargement Copy, Advanced Preview), Print Plug-in for Microsoft Word/Excel/PowerPoint for Windows, Digital Photo Front-Access for Windows, PosterArtist Lite for Windows

Utilities
Media Configuration Tool, GARO Device Setup Utility

Device Status
GARO Status Monitor, Remote UI

Printer Language
GARO, HP-GL/2, HP RTL

Operating Systems**
Windows® 2000/XP/ Server 2003/Windows Vista®
Macintosh® OS 9/10 (PowerPC or Intel)

Interface

Standard (Built-in)
USB 2.0 Hi-Speed, 10/100Base-T/TX

Optional
IEEE1394 (FireWire)

Acoustic Noise

Operation
52dB (A) or Less

Standby
35dB (A) or Less

Acoustic Power
6.6 Bels

Power Supply
AC 100–120V (50-60Hz)

Power Consumption

Maximum
100W or Less

Standby
6W or Less
(7W or less when EB-05 is installed)

Power Off
1W or Less
(Executive Order Compliant)

Certifications
UL® FCC Class B, ENERGY STAR®

Operational Environment

Temperature
59 – 86 F° (15 – 30 C°)

Relative Humidity
10 – 80% (No Condensation)

Printer Dimensions (H x W x D)
12.5" x 32.2" x 28.9" (317mm x 819mm x 733mm)

Weight
Approx. 86 lb. (39kg)

Options
IEEE1394 Expansion Board (EB-05)
Auto Roll Feed Unit (RU-02)
Cabinet Stand (CB17-01)
Roll Holder Set (RH2-11)
Printer Stand (ST-11)
Desktop Basket (BU-02)

User Replaceable Items
Print-Head (PF-03)
Ink Tanks (PFI-102)
Maintenance Cartridge (MC-05)

What's In The Box
Printer, User Software CD (Printer Driver, HDI Driver, Utilities), Application CDs (PosterArtist Lite, 2), 6 Starter Ink Tanks (MBK x2, Cyan, Magenta, Yellow, Black), 2" Core Media Spool, Print Head, Maintenance Cartridge, Built-in Ethernet/USB 2.0 Interface, Quick Setup Guide (Poster), Printer Reference Guide (Booklet), Power Cord, Registration Card

- * After user adjustment and under the same environmental conditions. Applies to media for line drawing only.
- ** Theoretical value based on data resolution
- *** The starter ink tanks initially packaged with the printer are not the same capacity as the replacement ink tanks specified here.
- ◆ Requires optional roll feed unit
- † The maximum printable length varies depending on the application, OS, and RIP used. The maximum printable length from Printer Driver is 50 feet.
- †† For AutoCAD or AutoCAD LT 2000/2000i/2002/2003/2004/2005/2006/2007
- Windows 2000/XP/2003 Server and for Macintosh, Auto Layout, and imageRUNNER Linking Function
- For imagePROGRAF Printer Driver. For printing from PostScript applications such as Adobe® Illustrator® or QuarkXPress™, please use a PostScript® compatible RIP package. For a list of Canon recommended RIP packages, please consult with Canon Alliance and Industry Market program list of RIP vendors.

Canon
image*ANYWARE*

1-800-OK-CANON
www.usa.canon.com

Canon U.S.A., Inc.
One Canon Plaza
Lake Success, NY 11042

As an ENERGY STAR® Partner, Canon U.S.A., Inc. has determined that this product meets the ENERGY STAR guidelines for energy efficiency. ENERGY STAR and the ENERGY STAR mark are registered U.S. marks. Adobe, PostScript and Illustrator are registered trademarks of Adobe Systems Incorporated in the United States and/or other countries. AutoCAD is a trademark of Autodesk, Inc. in the United States. Macintosh is a registered trademark of Apple Inc. Windows and Windows Vista are registered trademarks of Microsoft Corporation in the United States and/or other countries. UL is a registered trademark of Underwriters Laboratories Inc. QuarkXPress is a trademark of Quark, Inc. and all applicable affiliated companies, Reg. U.S. Pat. and Tm. Off. and in many other countries. CANON, IMAGEPROGRAF, IMAGERUNNER, and the GENUINE logo are registered trademarks of Canon Inc. in the United States and may also be registered trademarks or trademarks in other countries. IMAGEANYWARE is a trademark of Canon. All referenced product names and other marks are trademarks of their respective owners. Specifications and availability subject to change without notice. ©2009 Canon U.S.A., Inc. All rights reserved.

0509-iPF510-PDF-DM

